

Product availability : Stock - Normally stocked in distribution facility



Price\* : 2751.95 USD



### Main

Range of product	Modicon Quantum automation platform
Product or component type	Power supply module
Power supply type	Redundant

### Complementary

Input voltage	230 V AC 170...276 V 115 V AC 93...138 V 47...63 Hz
Input current	1100 mA 115 V 600 mA 230 V
Inrush current	19 A 230 V 38 A 115 V
Rated power in VA	130 VA
Associated fuse rating	2 A slow-blow
Harmonic distortion	<= 10 % of fundamental rms value
Output voltage	5.1 V DC
Power supply output current	11 A 140 °F (60 °C) standalone 10 A 140 °F (60 °C) redundant
Output overvoltage protection	Internal
Output overload protection	Internal
Power dissipation	6 + (1.5 x Iout) where Iout is in A
Alarm output	1 NC 6 A 220 V power supply fault
Local signalling	1 LED green power (PWR OK)
Marking	CE
Module format	Standard
Product weight	1.43 lb(US) (0.65 kg)

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.

## Environment

Protective treatment	Conformal coating Humiseal 1A33
Standards	UL 508 CSA C22.2 No 142
Product certifications	CUL
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	9.14 V/yd (10 V/m) 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

## Ordering and shipping details

Category	18155 - QUANTUM I/O & POWER SUPPLIES
Discount Schedule	PC21
GTIN	00785901449874
Nbr. of units in pkg.	1
Package weight(Lbs)	2.21
Returnability	N
Country of origin	CN

## Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0851 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available
Product end of life instructions	Available

## Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

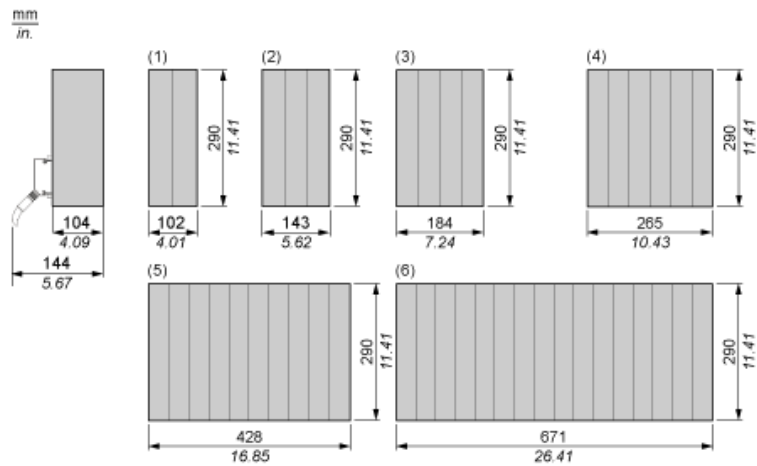


- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

---

## 115/230 Vac, 11 A Redundant Power Supply Module

---

### Wiring Diagram



NOTE: A normally closed relay contact rated at 220 Vac, 6 A / 30 Vdc, 5 A is available on terminals 1 and 2 of the power terminal strip. This contact set may be used to signal input power OFF. The relay will de-energize when input power drops below 8 Vdc.